


78cm Induction Cooktop


ILD786G5

- 
78CM WIDE
- 
AUTO STOP
- 
EXPERT MODE
- 
STOP & GO
- 
AUTO PAN DETECTION
- 
24 MONTH WARRANTY
- 
TOUCH CONTROL
- 
CHILD LOCK
- 
DIGITAL DISPLAY

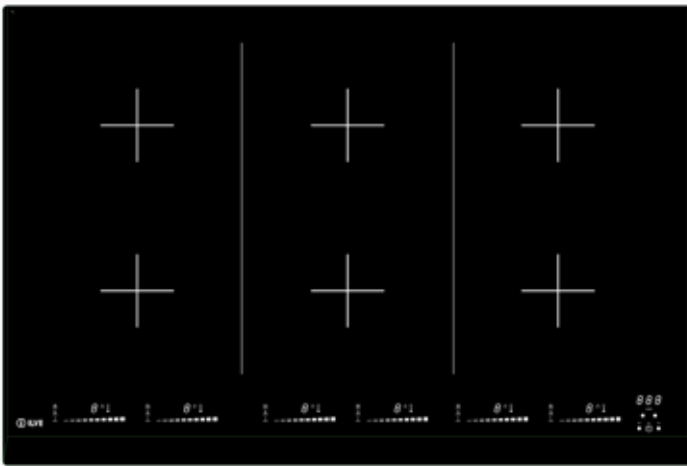

ILVE's induction cooktops are for people who have been thinking about upgrading their cooktop at home but aren't able to go gas, ILVE's induction systems are the ultimate alternative.

Unlike normal electric cooktops, induction technology produces heat by creating a magnetic field which generates heat directly to the cooking vessel. This means that the heat is instantaneous, temperature control is immediate and the heat is evenly spread over the bottom of the pan, meaning no more annoying hot or cold spots, the ILVE induction elements also include booster zones to minimize heat up times even further.


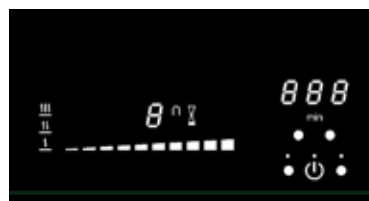


78cm Induction Cooktop

ILD786G5

Model ILD786G5 Induction Cooktop

- Designed for simple operation
- KeraBlack+ ceramic glass with Bevelled edges: 33mm front & 5mm on the sides
- Slider touch control with direct access to 11 heating levels (0-9 + Booster and double Booster)
- Auto pan detection
- White display
- Capacitive technology
- Ergonomic central position allows more space for the pots
- 6 boosters and 6 double boosters, 6 timers, egg-timer
- Bridge function, 3 auto-regulated temperatures (42°C, 70°C, 93°C)
- Standby consumption < 0,5W
- 'Stop & Go' feature
- ECO-modus (to reach the chosen heat level using optimised power)
- Child lock
- 6 residual heat indicators
- Long-life Thermostated Cooling an
- Auto-Power (heating area and delivered power adapt themselves to the pot being used)
- Auto-Stop (in case of accidental start, long absence, overflow or over-temperature)
- Fast heat-up time

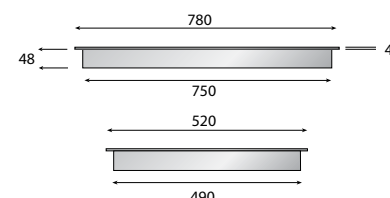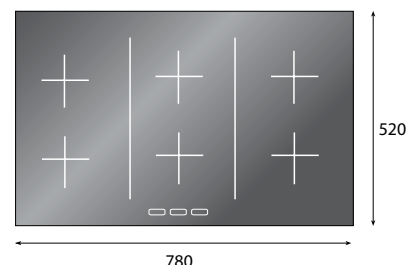

Model ILD786G5 Induction Hob

Cut out (LxD) : 750 x 490mm –
 thickness :
 48 mm + 4mm glass
 Size (LxD) : 780 x 520 mm, R=5
 Electrical network 220-240 V, 50/60 Hz
 Total Electrical Consumption: 11.1kW/h

Position	Ø serigraphy	Ø inductor	“g”*	Boosters*
All zones	-	220x180 mm	2100 W	2600 / 3700 W

Connection	Cable Diameter	Cable
1 Phase + N	3 x 4 mm	H 05 VV - F H 05 RR - F
2 Phases + N	4 x 2.5 mm	H 05 VV - F H 05 RR - F
3 Phases + N	5 x 1.5 mm	H 05 VV - F H 05 RR - F



For installation specifications, please consult with ILVE. For optimum installation, we recommend using the actual product as the best guide.

08012019

Australia National Telephone Number 1300 MYILVE (694 583) New Zealand Telephone Number 0508 458 369
 ILVE showrooms are open Tuesday - Friday from 9am-5pm and Saturdays 10am-4pm. CLOSED Monday & Sunday

ilve.com.au

NSW & ACT (Head Office)

48-50 Moore Street
 Leichhardt
 F 02 8569 4699

VIC & SA

1211 Toorak Road
 Camberwell
 F 03 9809 2155

QLD

1/42 Cavendish Road
 Coorparoo
 F 07 3397 0850

WA & NT

Unit 10/55 Howe Street
 Osborne Park
 F 08 9201 9188

TAS (Crisp Ikin)

3 Pear Avenue
 Derwent Park, 7009
 P 03 6272 7386

New Zealand

PO Box 11.160
 Sockburn Christchurch
 F 03 344 5906

DISCLAIMER

Eurolinx PTY LTD, trading as ILVE Appliances, is continually seeking ways to improve the design specifications, aesthetics and production techniques of its products. As a result alterations to our products and designs take place continually. Whilst every effort is made to produce information and literature that is up to date, this brochure should not be regarded as an infallible guide to the current specifications, nor does it constitute an offer for the sale of any particular product. Product dimensions indicated in our literature is indicative only. Actual product only should be used to define dimension cutouts. Distributors, and retailers are not agents of ILVE Appliances and are not authorized to bind ILVE Appliances by any express or implied undertaking or representation.